

CUSTOMER DRAWING

REV.	ECN NO.	DESCRIPTION	DATE	DRAWER	APPROVER
A0		NEW	2019/7/22	GZZ	
A1		Change Fool-Proof	2019/9/19	GZZ	






NOTES:


1.Material:
Housing:Thermoplastic UL 94V-0,Black
Contact: Copper Alloy
Screw: Steel

2.Finish:Plating Nickel

3.Specification
Current Rating: 15A Max.
Instant Current: 50A Max.
Voltage Rating: 125V Max.
Contact Resistance: 50m ohm Max.
Insulation Resistance:1000M ohm Min.
Dielectric Voltage: 500V
Operating Temperature:-20°C - +80°C

4.Mechanical:
Durability: 2500 Cycles Max.

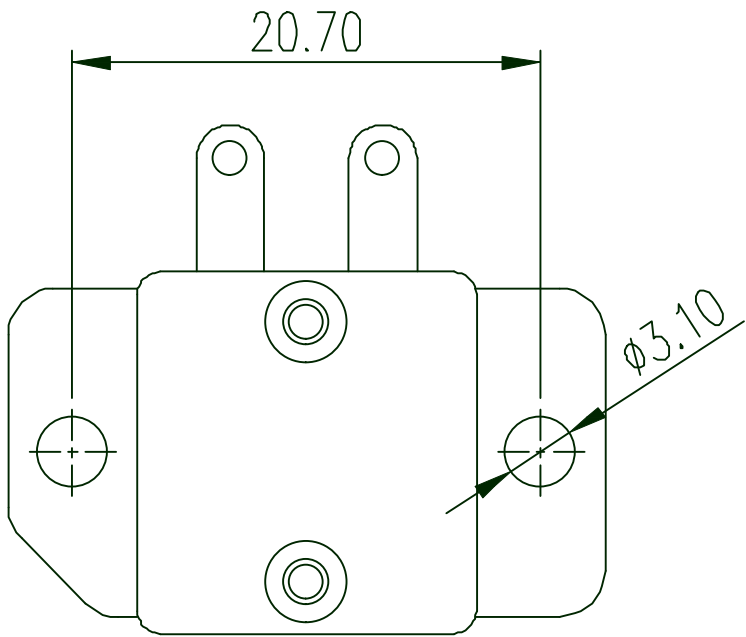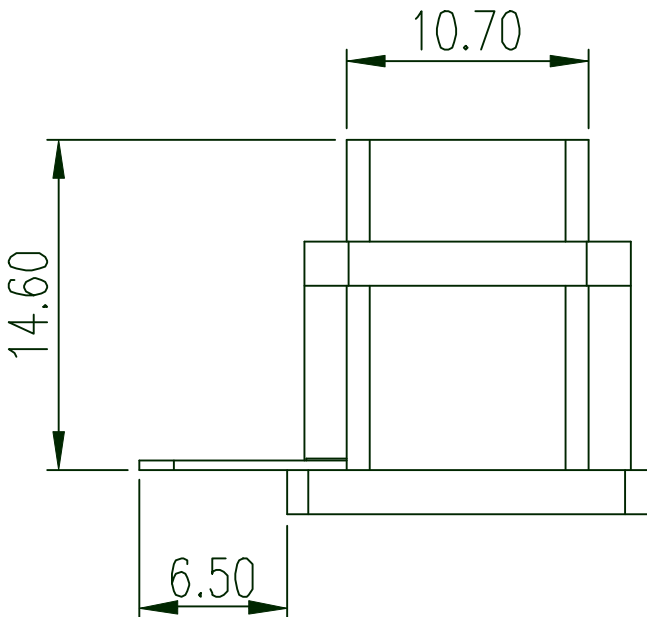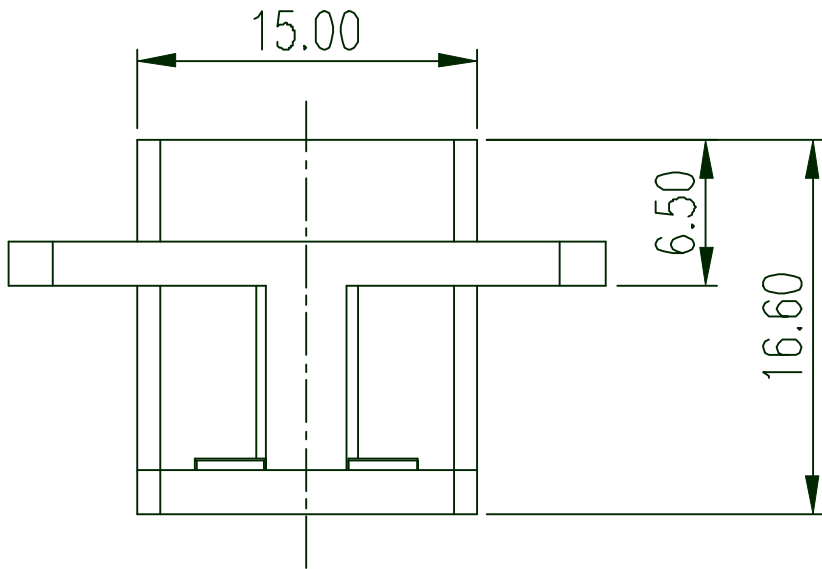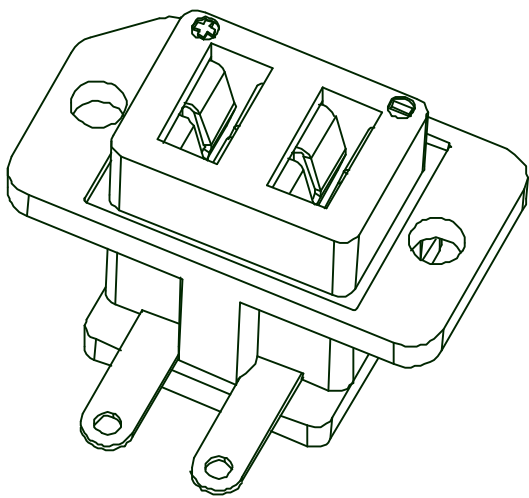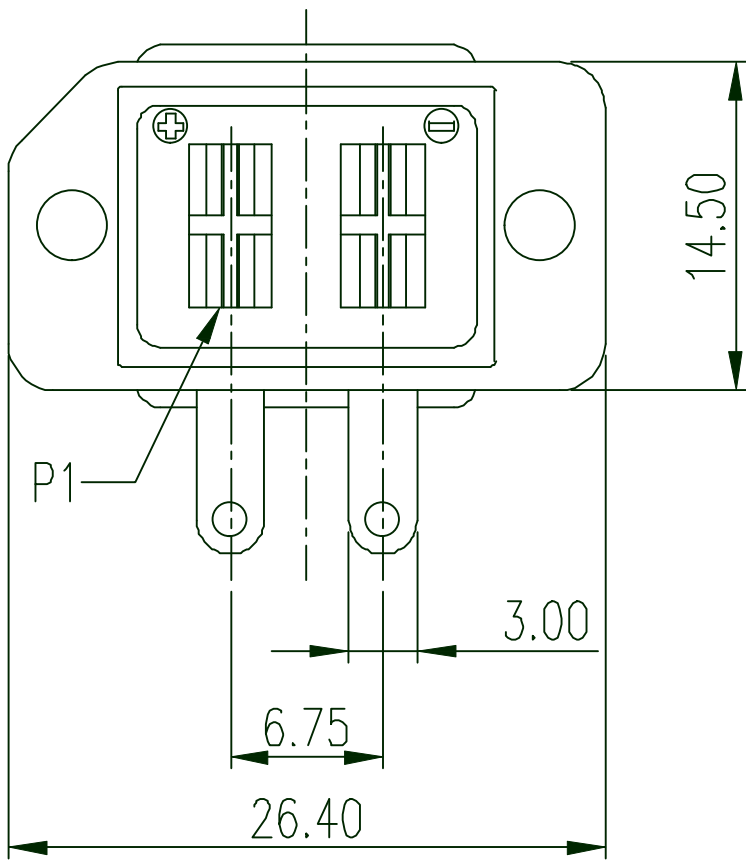

DIMENSION IN mm [inch]		MISA(SHENGZHEN)TECH CO.,LTD				6		
Tolerance unless otherwise specified								
X. ±--	X. ° ±10°	TITLE: 6.75mm Connector Female						
X.X ±0.38	X.X° ±5°							
X.XX ±0.25	X.XX° ±2°	MSD-6751F-2P				Scale	1:1	
X.XXX ±0.13	X.XXX° ±--					Size	A4	
Approver		Checker		SKY 2019/9/19	Drawer	GZZ 2019/9/19	Sheet	1/1

CUSTOMER DRAWING

REV.	ECN NO.	DESCRIPTION	DATE	DRAWER	APPROVER
A0		NEW	2019/7/22	GZZ	
A1		Change Fool-Proof	2019/9/19	GZZ	






NOTES:


1.Material:
Housing:Thermoplastic UL 94V-0,Black
Contact: Copper Alloy

2.Finish:Plating Nickel

3.Specification
Current Rating: 15A Max.
Instant Current: 50A Max.
Voltage Rating: 125V Max.
Contact Resistance: 50m ohm Max.
Insulation Resistance:1000M ohm Min.
Dielectric Voltage: 500V
Operating Temperature:-20°C - +80°C

4.Mechanical:
Durability: 2500 Cycles Max.

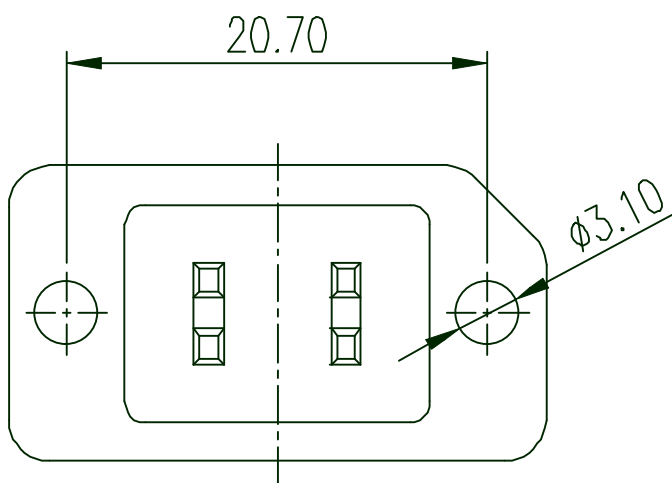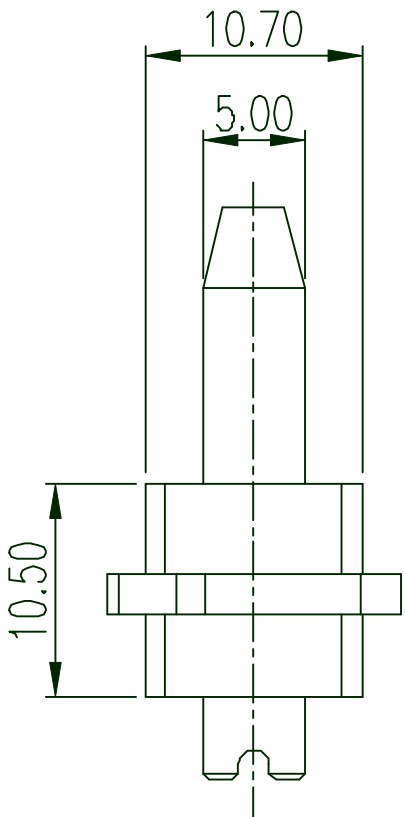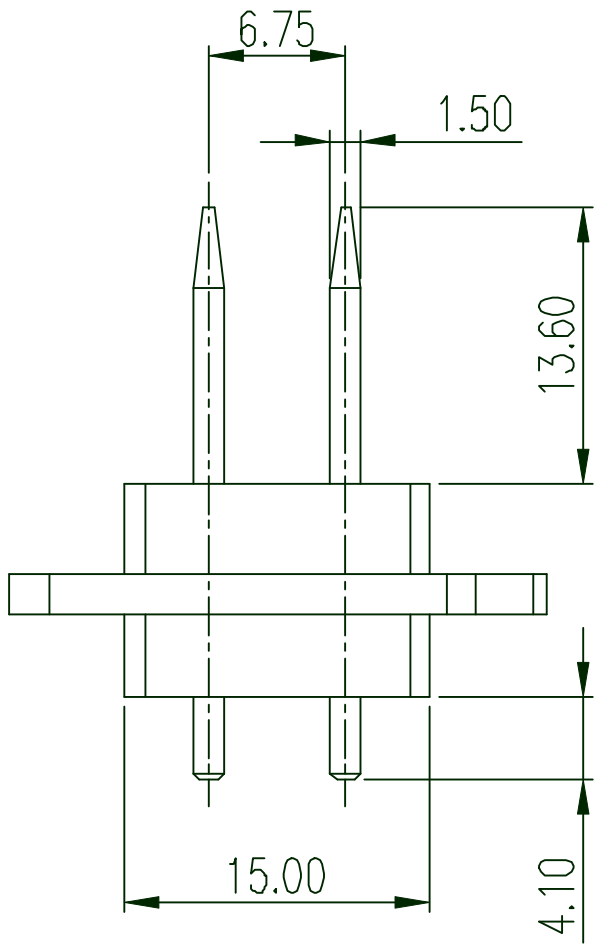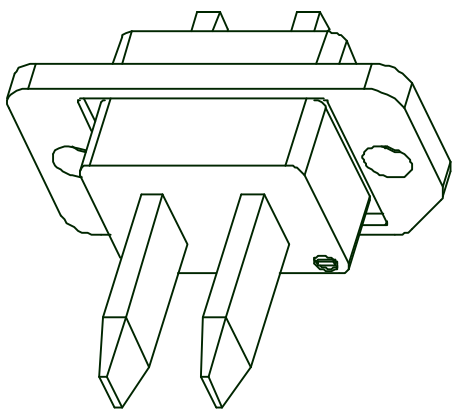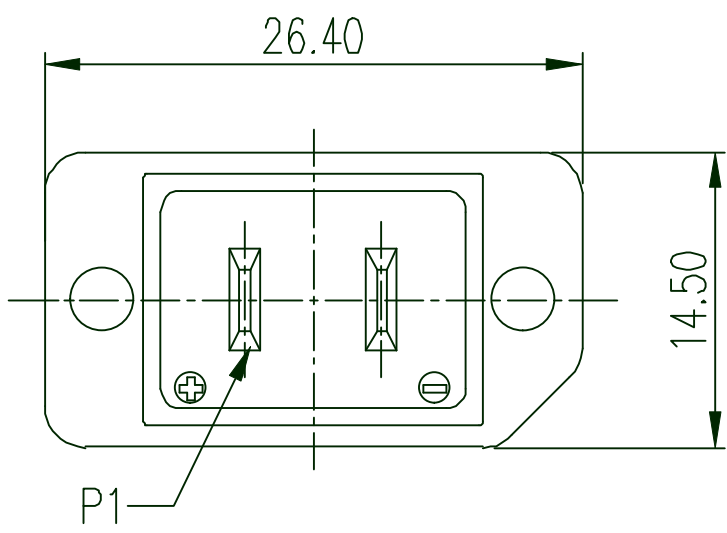

DIMENSION IN mm [inch]				MISA(SHENGZHEN)TECH CO.,LTD							
Tolerance unless otherwise specified											
X.	±--	X. °	±10°	TITLE: 6.75mm Connector Male							
X.X	±0.38	X.X°	±5°								
X.XX	±0.25	X.XX°	±2°	MSD-6751M-2P			Scale	1:1			
X.XXX	±0.13	X.XXX°	±--				Size	A4			
Approver		Checker		SKY 2019/9/19		Drawer		GZZ 2019/9/19		Rev.	A1
										Sheet	1/1